


Chapter 8

Rotational Kinematics

8.1 Rotational Motion and Angular Displacement

In the simplest kind of rotation, points on a rigid object move on circular paths around an **axis of rotation**.

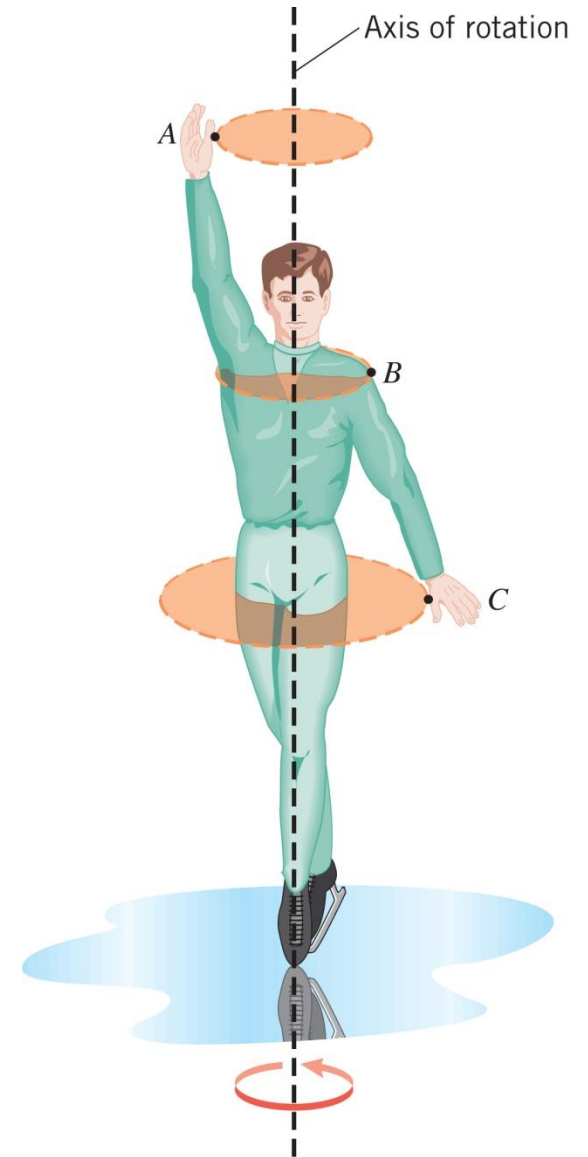


DEFINITION OF ANGULAR DISPLACEMENT

When a rigid body rotates about a fixed axis, the angular displacement is the angle swept out by a line passing through any point on the body and intersecting the axis of rotation perpendicularly.

By convention, the angular displacement is positive if it is counterclockwise and negative if it is clockwise.


$$\Delta\theta = \theta - \theta_0$$

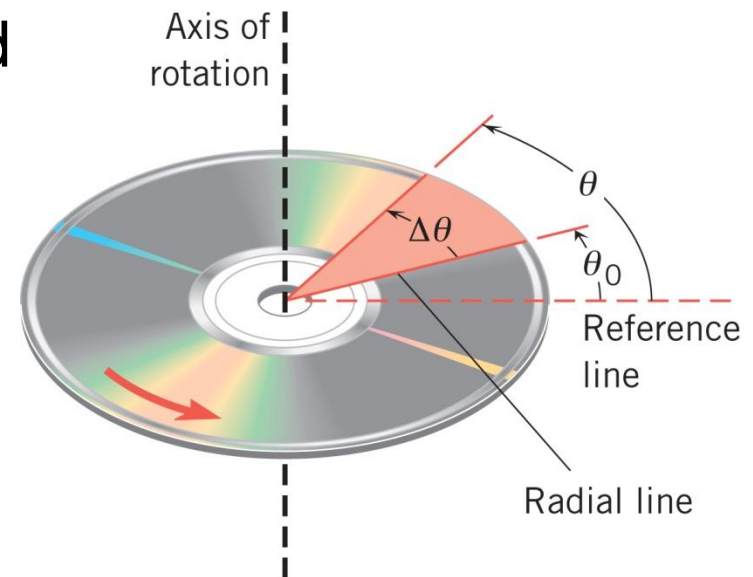

SI Unit of Angular Displacement: radian (rad)

8.1 Rotational Motion and Angular Displacement

$$\theta \text{ (in radians)} = \frac{\text{Arc length}}{\text{Radius}} = \frac{s}{r}$$

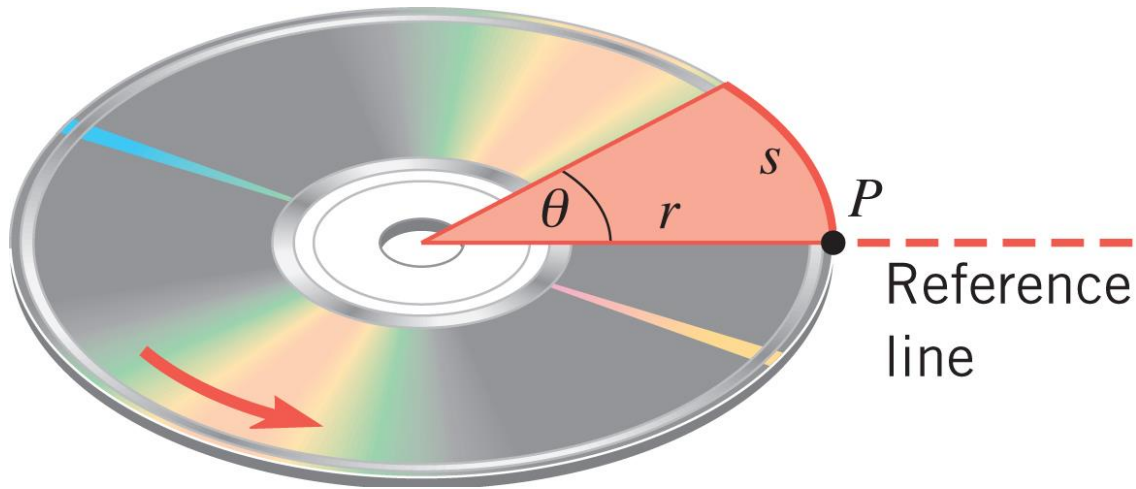

For a full revolution:

$$\theta = \frac{2\pi r}{r} = 2\pi \text{ rad} \quad \longrightarrow \quad 2\pi \text{ rad} = 360^\circ$$

DEFINITION OF AVERAGE ANGULAR VELOCITY

$$\text{Average angular velocity} = \frac{\text{Angular displacement}}{\text{Elapsed time}}$$

$$\bar{\omega} = \frac{\theta - \theta_o}{t - t_o} = \frac{\Delta\theta}{\Delta t}$$

SI Unit of Angular Velocity: radian per second (rad/s)

Direction? Clockwise and Counter clockwise

Example 3 Gymnast on a High Bar


A gymnast on a high bar swings through two revolutions in a time of 1.90 s.

Find the average angular velocity of the gymnast.

$$\bar{\omega} = \frac{\theta - \theta_o}{t - t_o} = \frac{\Delta\theta}{\Delta t}$$

$$\Delta\theta = 2 \text{ rev} = 4\pi \text{ rad}$$

$$\bar{\omega} = \frac{4\pi \text{ rad}}{1.9 \text{ s}} \quad 6.61 \text{ rad/s}$$

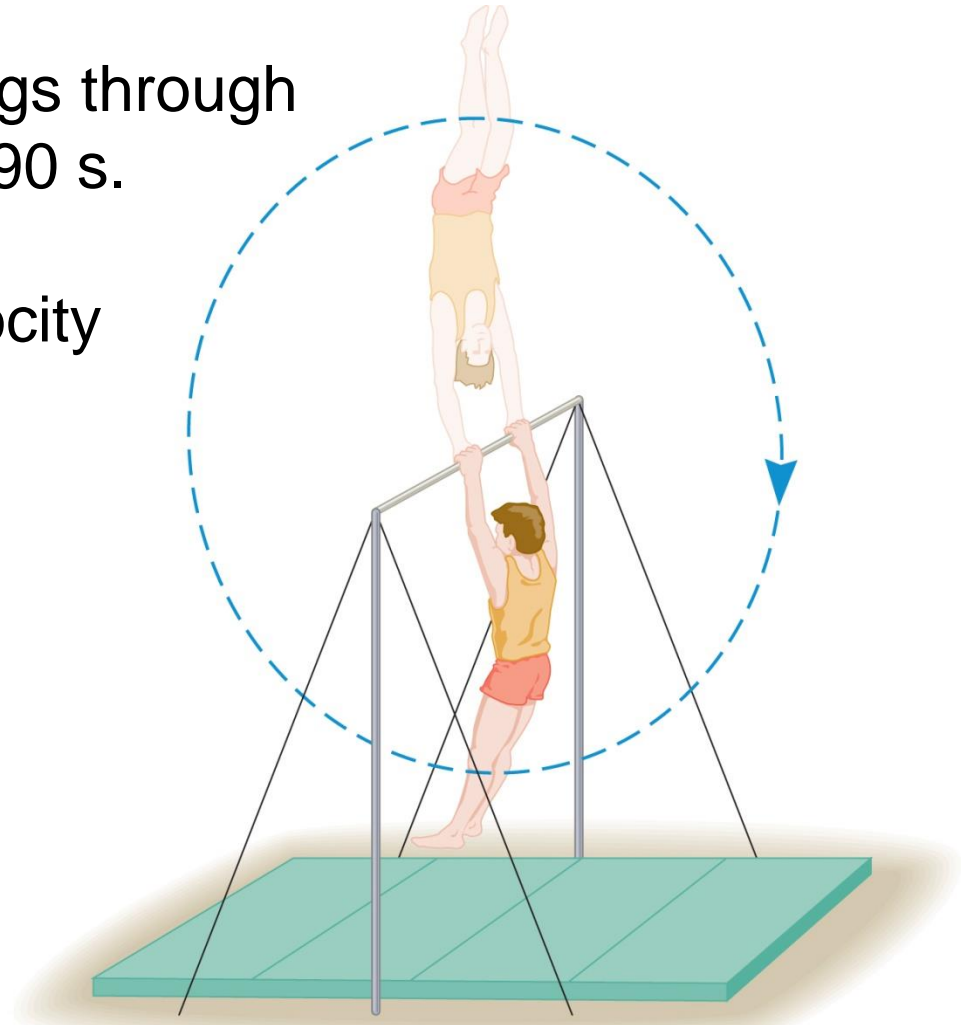

Changing angular velocity means that an **angular acceleration** is occurring.

DEFINITION OF AVERAGE ANGULAR ACCELERATION

Average angular acceleration = $\frac{\text{Change in angular velocity}}{\text{Elapsed time}}$


$$\bar{\alpha} = \frac{\omega - \omega_o}{t - t_o} = \frac{\Delta\omega}{\Delta t}$$

SI Unit of Angular acceleration? rad/s²

Direction? Same as the direction of
change in angular velocity

Example 4 A Jet Revving Its Engines

As seen from the front of the engine, the fan blades are rotating with an angular speed of -110 rad/s . As the plane takes off, the angular velocity of the blades reaches -330 rad/s in a time of 14 s .

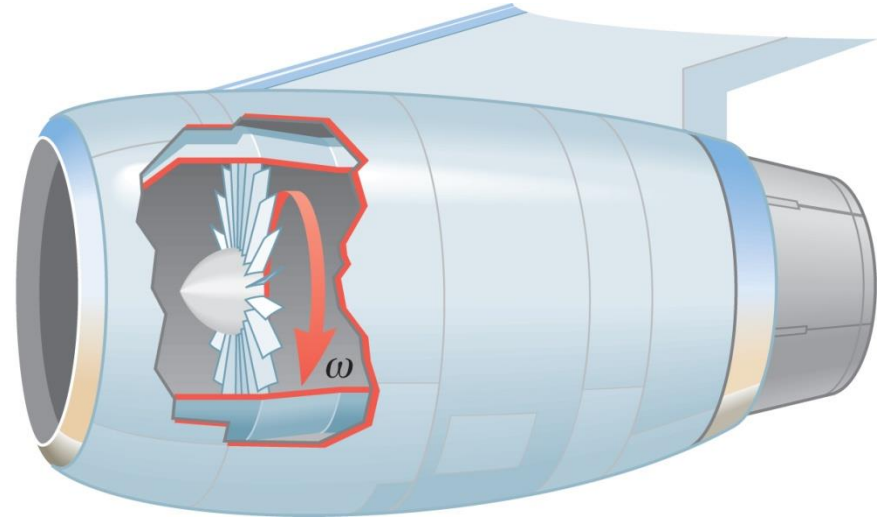

Find the angular acceleration, assuming it to be constant.

$$\bar{\alpha} = \frac{\omega - \omega_o}{t - t_o} = \frac{\Delta\omega}{\Delta t} \qquad -15.71 \text{ rad/s}^2$$

8.3 The Equations of Rotational Kinematics

Recall the equations of kinematics for constant acceleration.

Five kinematic variables:

$$v = v_o + at$$

1. displacement, x

$$x = \frac{1}{2} (v_o + v) t$$

2. acceleration (constant), a

3. final velocity (at time t), v

$$v^2 - v_o^2 = 2ax$$

4. initial velocity, v_o


5. elapsed time, t

$$x = v_o t + \frac{1}{2} at^2$$



8.3 The Equations of Rotational Kinematics

The equations of rotational kinematics for constant angular acceleration:

ANGULAR VELOCITY



$$\omega = \omega_o + \alpha t$$

ANGULAR ACCELERATION



$$\theta = \frac{1}{2}(\omega_o + \omega)t$$

TIME



ANGULAR DISPLACEMENT

$$\omega^2 - \omega_o^2 = 2\alpha\theta$$

$$\theta = \omega_o t + \frac{1}{2} \alpha t^2$$

8.3 The Equations of Rotational Kinematics

Table 8.2 Symbols Used in Rotational and Linear Kinematics

Rotational Motion	Quantity	Linear Motion
θ	Displacement	x
ω_0	Initial velocity	v_0
ω	Final velocity	v
α	Acceleration	a
t	Time	t

Table 8.1 The Equations of Kinematics for Rotational and Linear Motion

Rotational Motion ($\alpha = \text{constant}$)		Linear Motion ($a = \text{constant}$)	
$\omega = \omega_0 + \alpha t$	(8.4)	$v = v_0 + at$	(2.4)
$\theta = \frac{1}{2}(\omega_0 + \omega)t$	(8.6)	$x = \frac{1}{2}(v_0 + v)t$	(2.7)
$\theta = \omega_0 t + \frac{1}{2}\alpha t^2$	(8.7)	$x = v_0 t + \frac{1}{2}at^2$	(2.8)
$\omega^2 = \omega_0^2 + 2\alpha\theta$	(8.8)	$v^2 = v_0^2 + 2ax$	(2.9)

8.3 *The Equations of Rotational Kinematics*

Reasoning Strategy

- Make a free body drawing.
- Decide which directions are to be called positive (+) and negative (-).
(The text uses CCW to be positive.)
- Write down the values that are given for any of the five kinematic variables.
- Verify that the information contains values for at least three of the five kinematic variables. **Select the appropriate equation.**
- When the motion is divided into segments, remember that the final angular velocity of one segment is the initial velocity for the next.
- Keep in mind that there may be two possible answers to a kinematics problem.

Example 5 Blending with a Blender

The blades are whirling with an angular velocity of $+375 \text{ rad/s}$ when the “puree” button is pushed in.

When the “blend” button is pushed, the blades accelerate and reach a greater angular velocity after the blades have rotated through an angular displacement of $+44.0 \text{ rad}$.

The angular acceleration has a constant value of $+1740 \text{ rad/s}^2$.

Find the final angular velocity of the blades.

$$\omega^2 = \omega_o^2 + 2\alpha\theta$$


$$542 \text{ rad/s}$$



8.4 Angular Variables and Tangential Variables

\vec{V}_T = tangential velocity


v_T = tangential speed

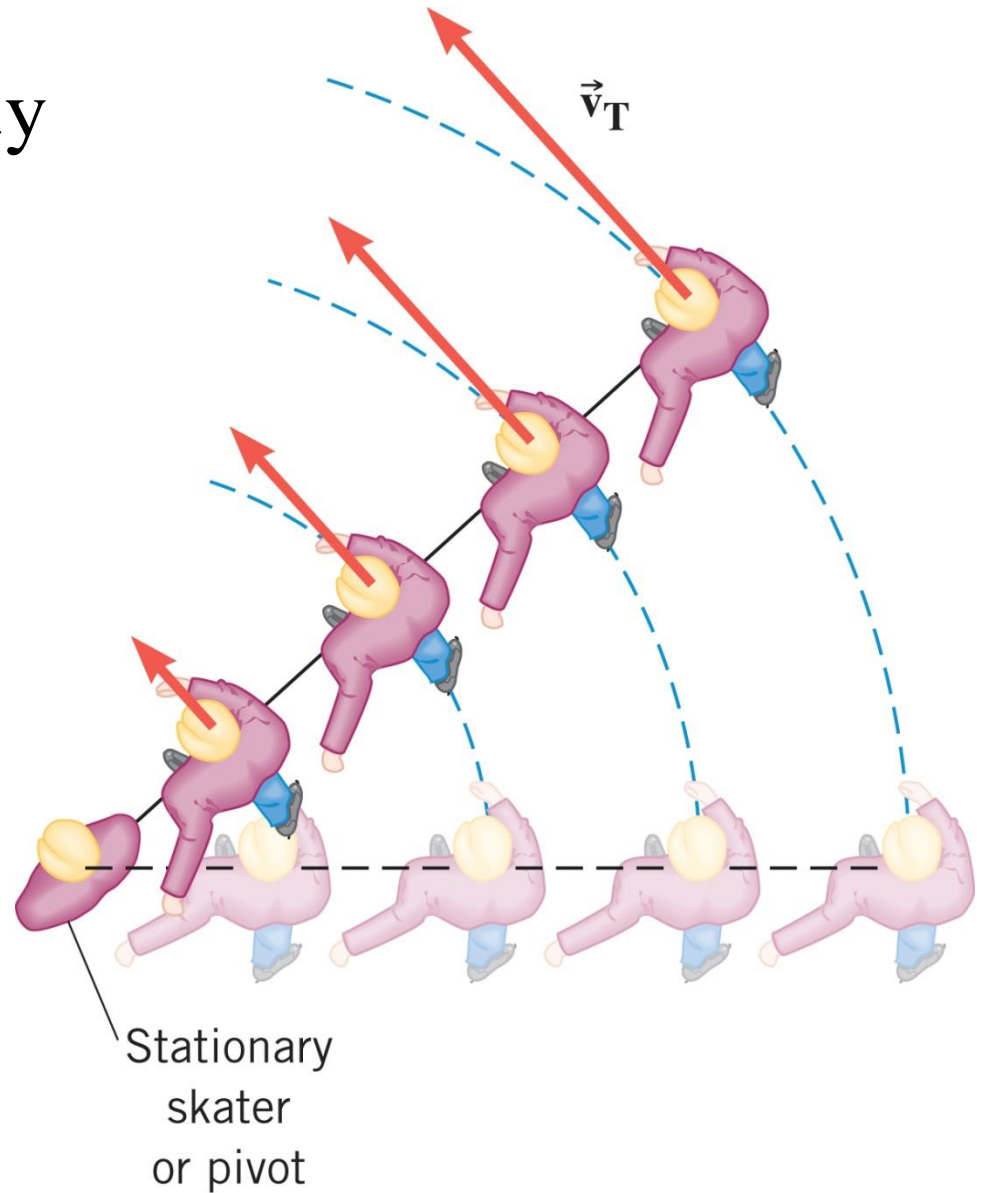

8.4 Angular Variables and Tangential Variables

$$v_T = \frac{s}{t} = \frac{r\theta}{t} = r \left(\frac{\theta}{t} \right) \quad \omega = \frac{\theta}{t}$$

$$v_T = r\omega \quad (\omega \text{ in rad/s})$$

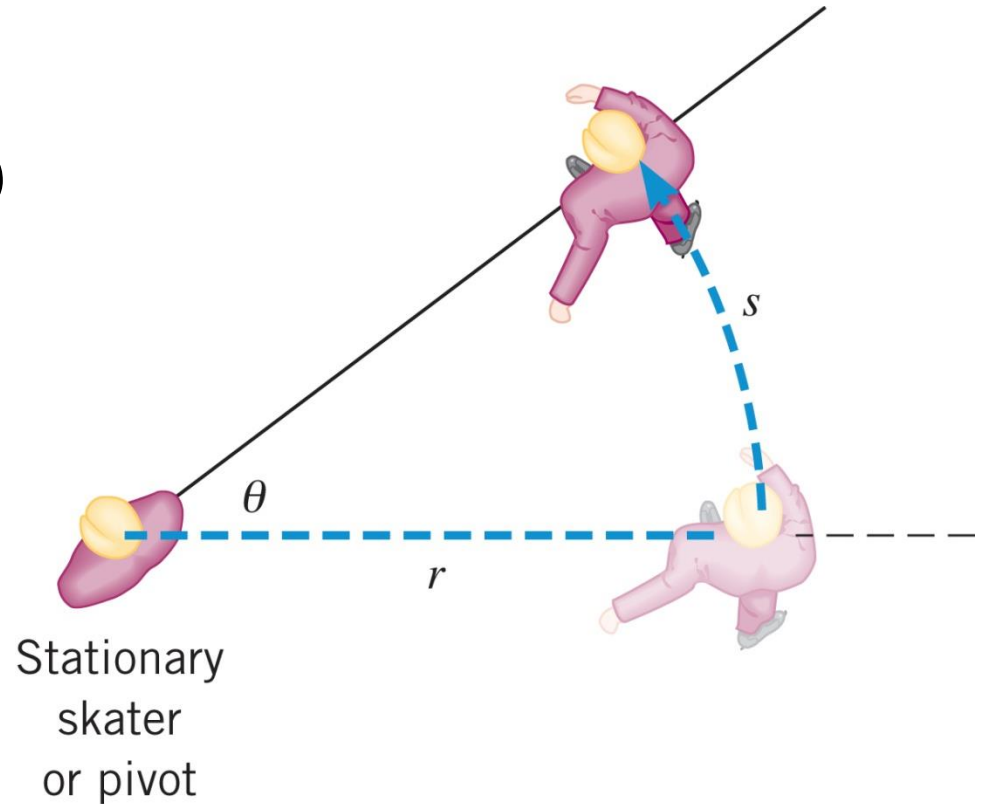


8.4 Angular Variables and Tangential Variables

$$\alpha = \frac{\omega - \omega_o}{t}$$


$$a_T = \frac{v_T - v_{T_o}}{t} = \frac{(r\omega) - (r\omega_o)}{t} = r \frac{\omega - \omega_o}{t}$$

$$a_T = r\alpha \quad (\alpha \text{ in rad/s}^2)$$

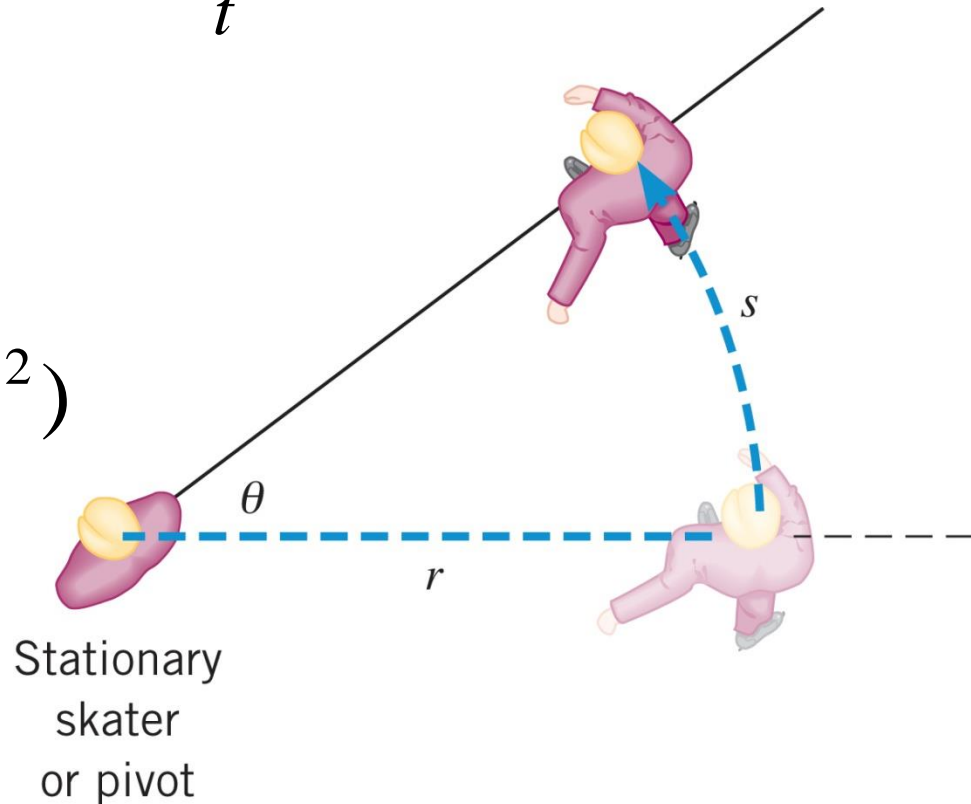


8.5 Centripetal Acceleration and Tangential Acceleration

$$a_c = \frac{v_T^2}{r} = \frac{(r\omega)^2}{r} = r\omega^2 \quad (\omega \text{ in rad/s})$$

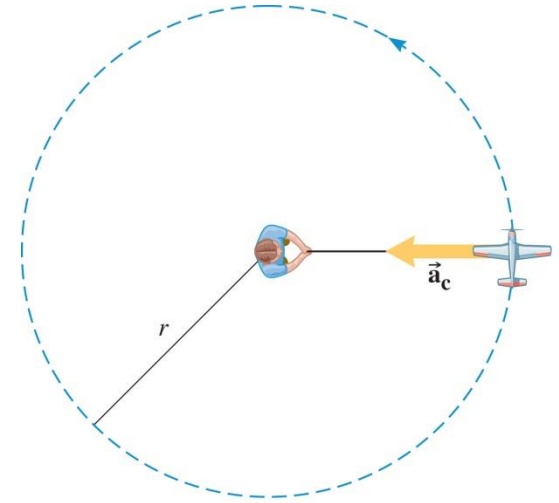

(a) Uniform circular motion

$$a_T = r\alpha \quad (\alpha \text{ in rad/s}^2)$$

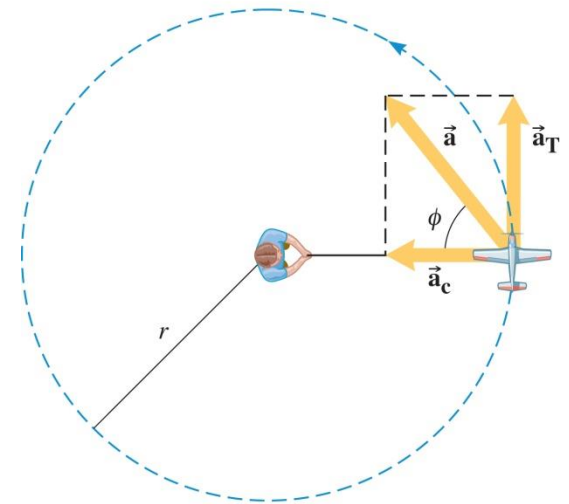

(b) Nonuniform circular motion

Example 7 A Discus Thrower

Starting from rest, the thrower accelerates the discus to a final angular speed of $+15.0 \text{ rad/s}$ in a time of 0.270 s before releasing it. During the acceleration, the discus moves in a circular arc of radius 0.810 m .


Find the magnitude of the total acceleration.

$$\omega = \omega_o + \alpha t \quad \text{Solve for } \alpha$$


$$a_T = r\alpha \quad \text{and} \quad a_c = r\omega^2$$

$$r = 0.810 \text{ m}$$

$$a = \sqrt{(a_T^2 + a_c^2)} \quad \phi = \tan^{-1}\left(\frac{a_T}{a_c}\right)$$

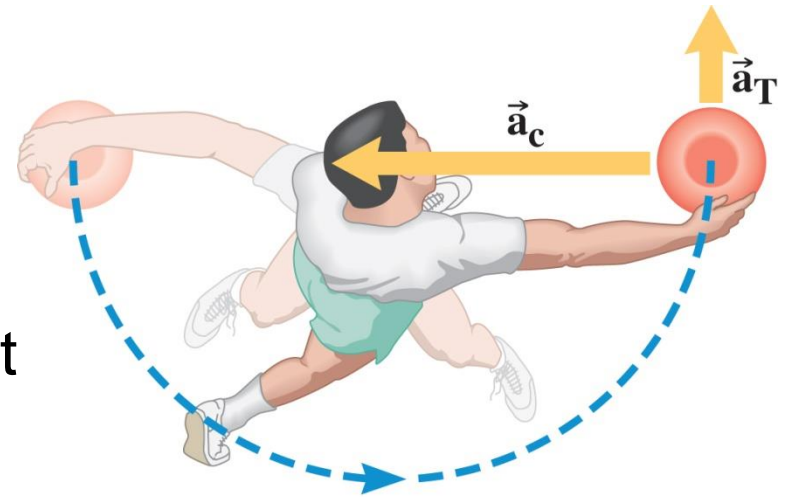

(a)

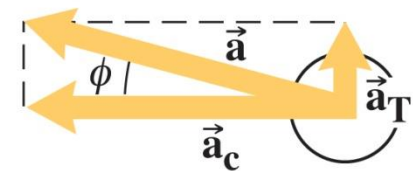


(b)

8.6 Rolling Motion


The tangential speed of a point on the outer edge of the tire is equal to the speed of the car over the ground.

$$v = r\omega$$

$$a = r\alpha$$

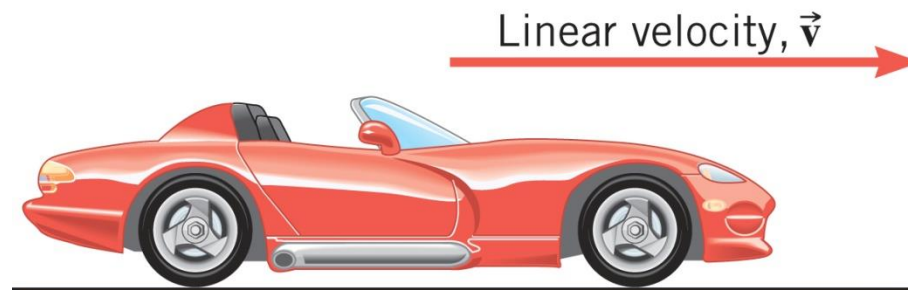

(a)

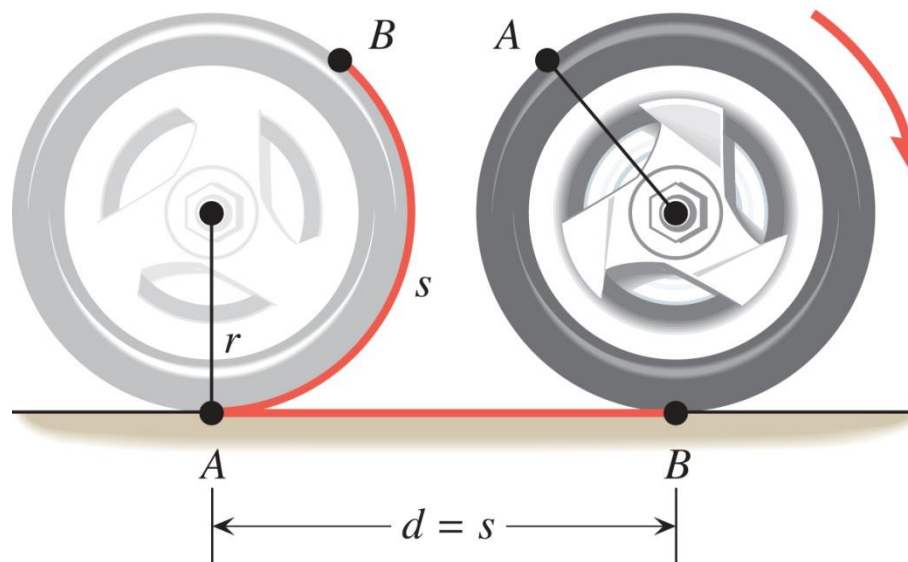

(b)

Example 8 An Accelerating Car

Starting from rest, the car accelerates for 20.0 s with a constant linear acceleration of 0.800 m/s^2 . The radius of the tires is 0.330 m .

What is the angle through which each wheel has rotated?


$$\omega_o = 0$$

$$a = r\alpha$$


$$\omega = \omega_o + \alpha t$$

$$\omega^2 - \omega_o^2 = 2\alpha\theta$$

Solve for θ

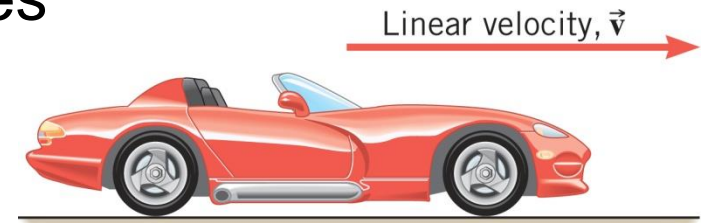

(a)

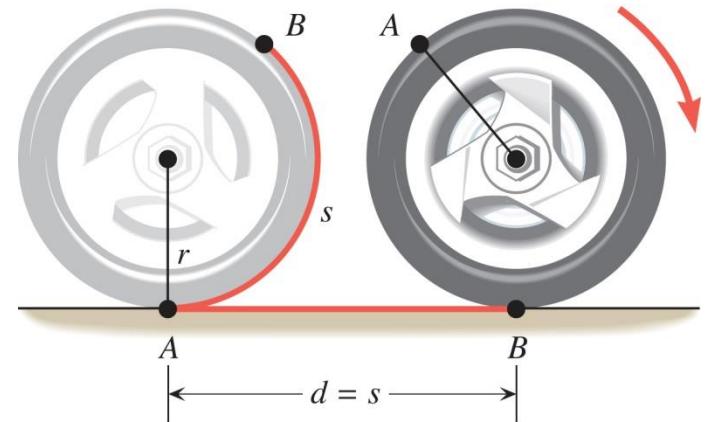

(b)